

8 HP INTEK™ IC






Model Series 202400

Displacement 18.6 cu. in. (305 cc)

Bore 3.12 in. (79 mm)

Stroke 2.43 in. (61 mm)

Oil Capacity 28 fl. oz. (0.82 l)

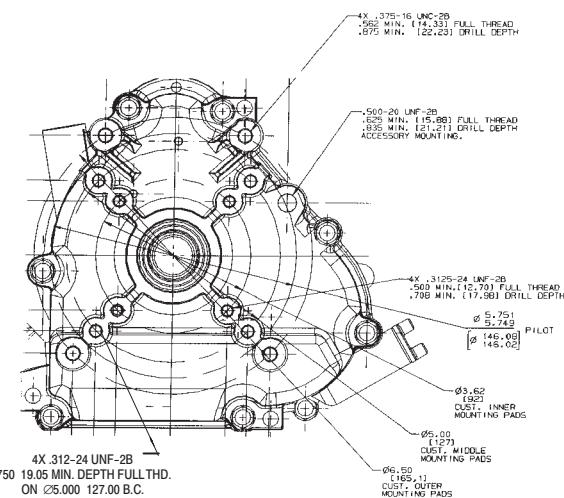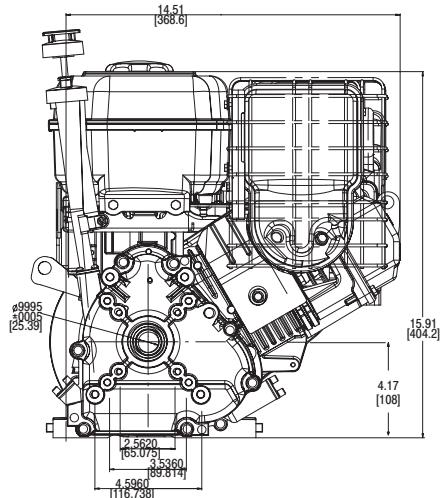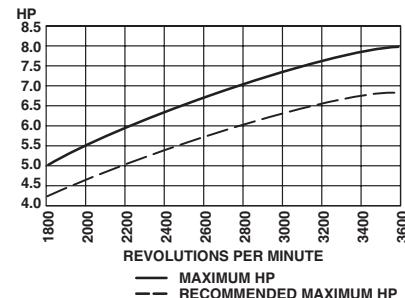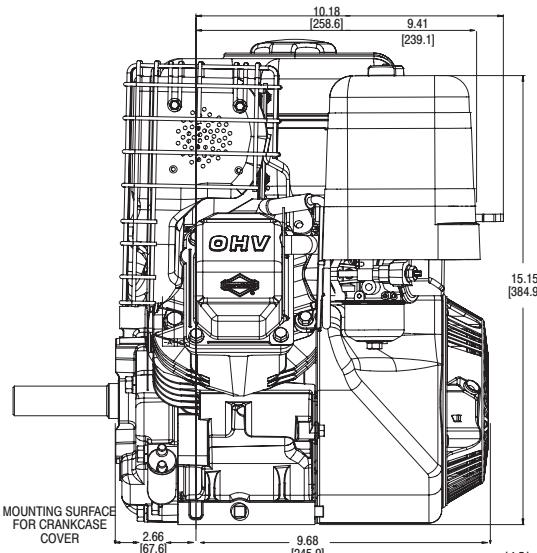

To make the center line of crankshaft the same as 190000 Model Series, order 695154 spacer kit.

Model Type	Shipping Weight	Crankshaft	Crankshaft (P.T.O.) Extension	Dimension	Starter Position	Bolt-On/Changeable Governor	Controls	Flange Mtg.	Manual Choke	Remote Stop Switch	Fuel Tank (Quarts)	Top Governor Speed	Notes
202432													
0035	51	695818	Threaded 1-14, 1" tapped length	3-21/32(c)	10:30	M	AG/R/MF	X	X	X	4	3600	•
0036	52	695369	1" dia., Keyway, tapped 3/8-24	2-29/32(c)	10:30	M	AG/R/MF	X	X	X	4	3600	•
0063	65	696412	3/4" dia., 3/16 Keyway, tapped 3/8-24	2-21/32(c)	10:30	M	AG/R/MF	X	X	X	4	3600	•
202437													
0033	69	696412	3/4" dia., 3/16 Keyway, tapped 3/8-24	2-21/32(c)	10:30	M	AG/R/MF	X	X	X	4	3600	•■
0041	60	695369	1" dia., Keyway, tapped 3/8-24	2-29/32(c)	10:30	M	AG/R/MF	X	X	X	4	3600	•◆
202452													
0049	65	695817	6 to 1 gear reduction ccw rotation gear shaft, 1" dia Keyway	2-29/32(a)	10:30	M	AG/R/MF	X	X	X	4	3600	

• Ball bearing PTO

◆ Engine equipped with 12 Volt Gear Drive Starter and 10 Amp DC Alternator with Starter Panel Assembly.

■ Engine equipped with 12 Volt Gear Drive Starter and 3 Amp DC Alternator